



1 / 17

FIG. 1

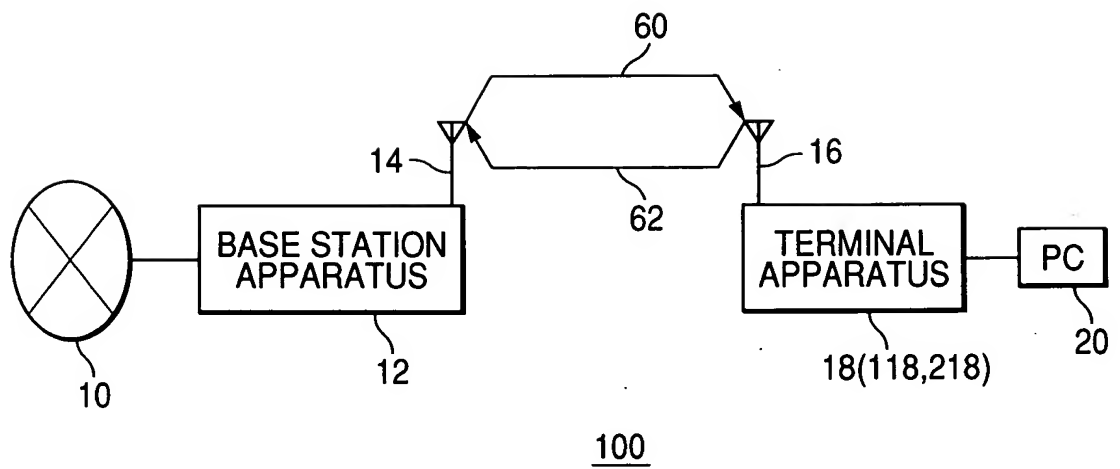


FIG. 2

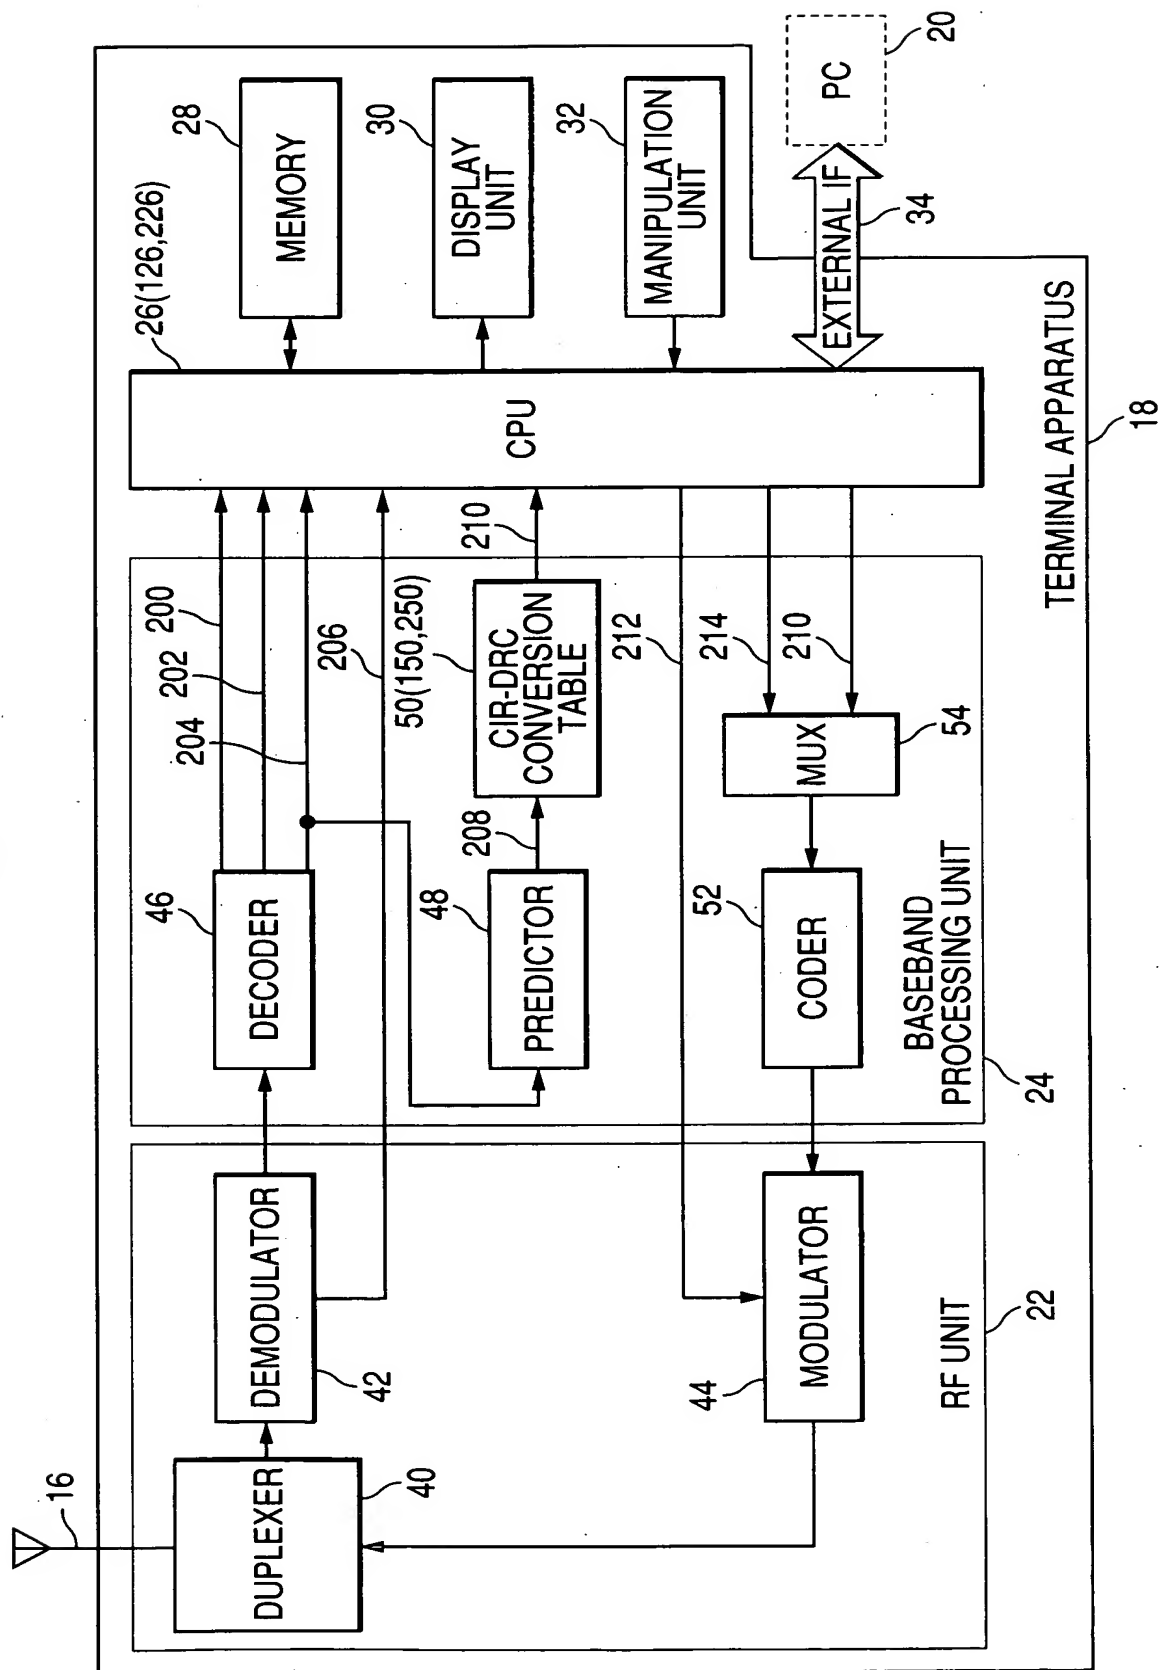


FIG. 3

CIR (dB)	DRC (kbps)
-12.5	38.4
-9.5	76.8
-8.5	102.6
-6.5	153.6
-5.7	204.8
-4.0	307.2
-1.0	614.4
1.3	921.6
3.0	1228.8
7.2	1843.2
9.5	2457.6

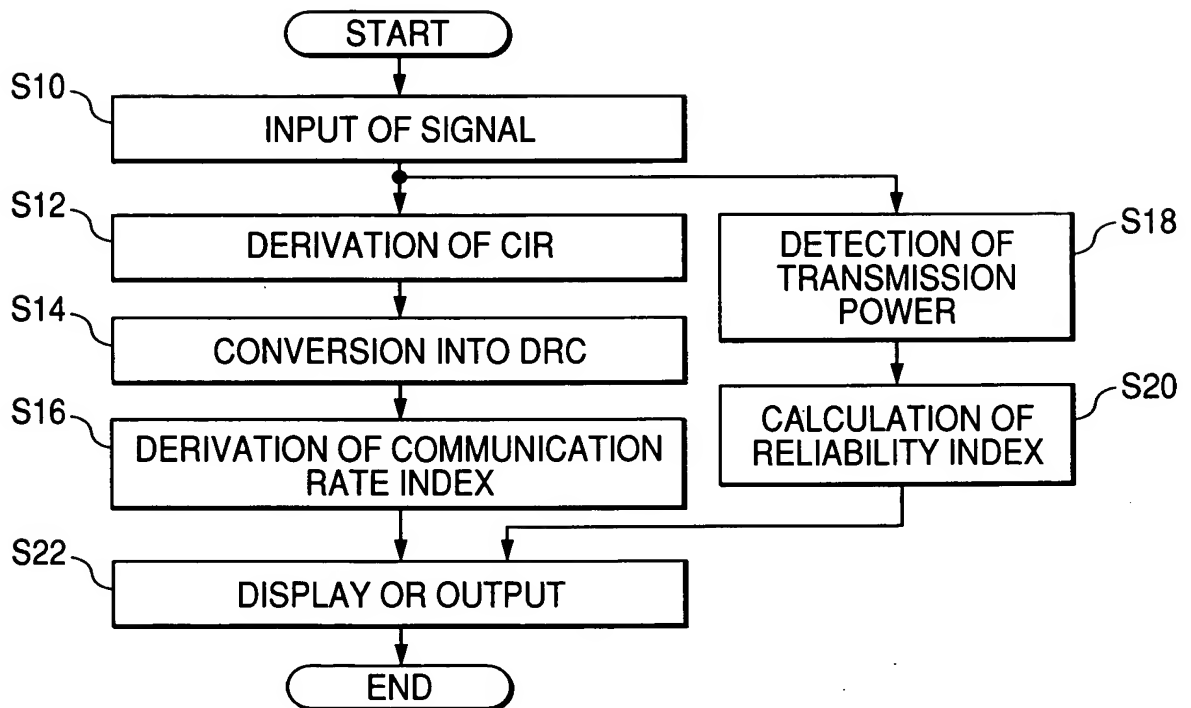
FIG. 4

FIG. 5

TRANSMISSION POWER VALUE (dBm)	[TRANSMISSION POWER VALUE] - [MAXIMUM TRANSMISSIBLE POWER VALUE] (dB)	INDEX VALUE
+22.5—	—0.5	0
+21.5—+22.5	0.5—1.5	1
+20.5—+21.5	1.5—2.5	2
+3.5—+4.5	18.5—19.5	19
—+3.5	19.5—	20

FIG. 6A

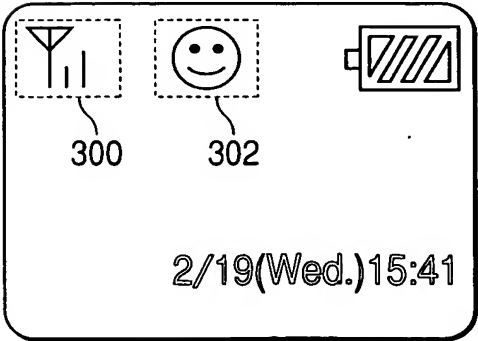


FIG. 6B

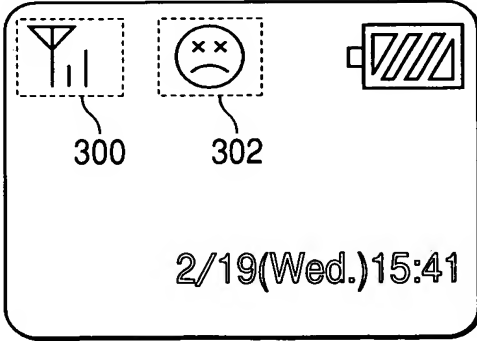


FIG. 7





LED INDICATION	 OFF	 FLASHING (1)	 FLASHING (2)	 ON
COMMUNICATION RATE INDEX	OUT OF RANGE	SLOW (LOWER THAN 500 kbps)	MEDIUM (500 kbps TO 1 Mbps)	FAST (HIGHER THAN 1 Mbps)
RELIABILITY INDEX	OUT OF RANGE	LOW	MEDIUM	HIGH

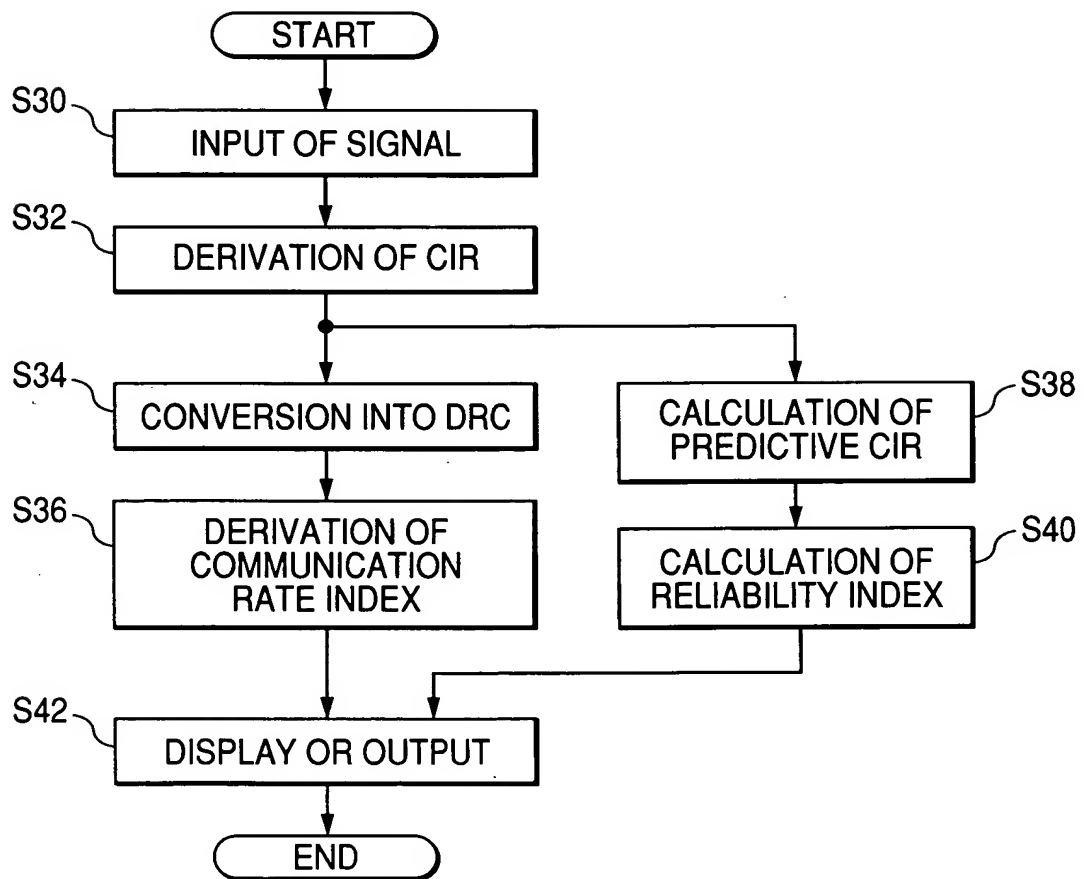
FIG. 8

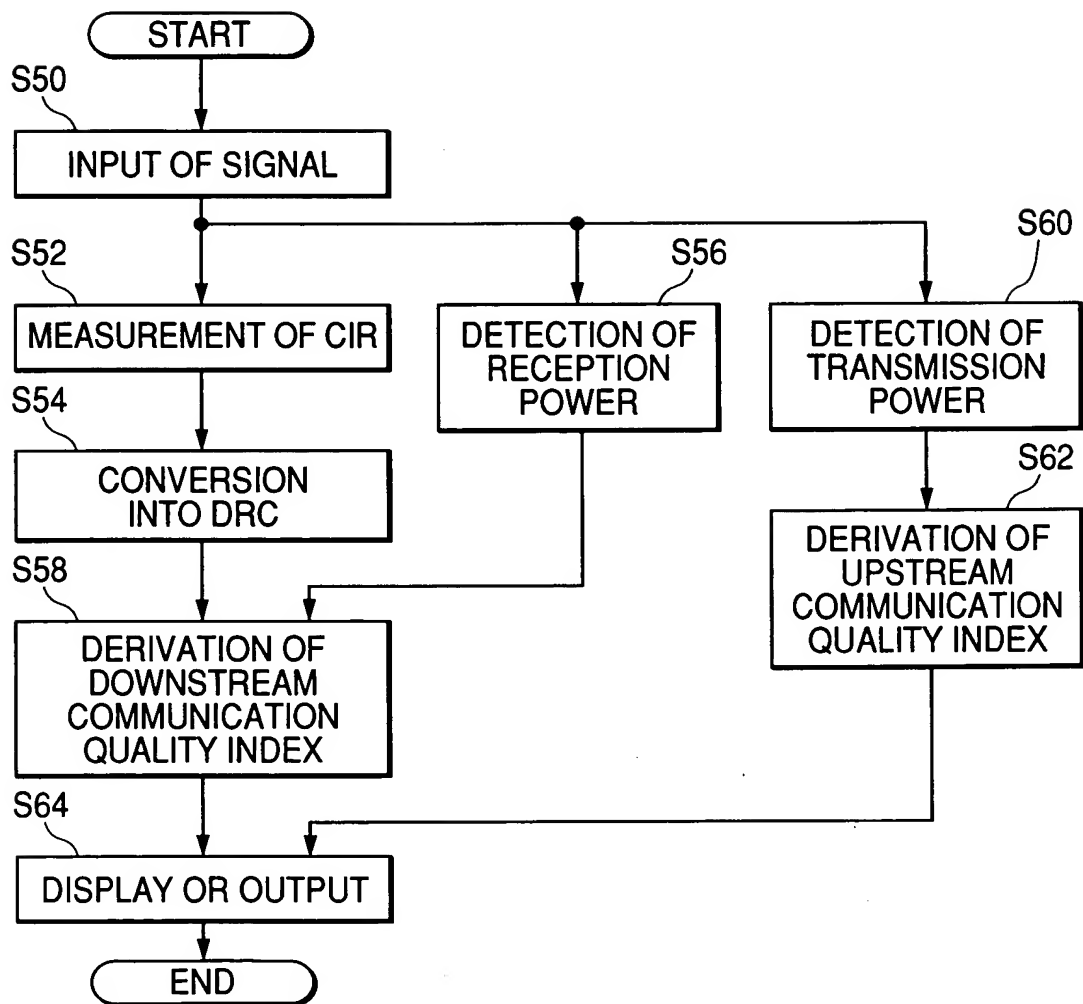
FIG. 9

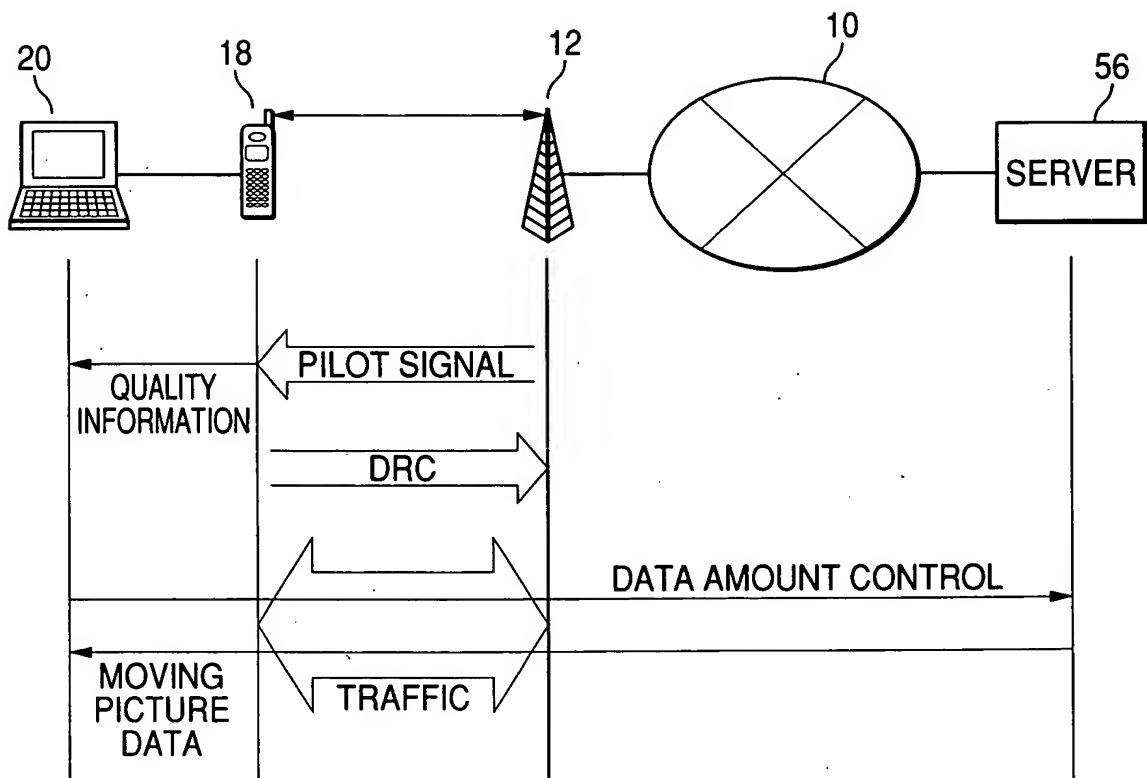
FIG. 10

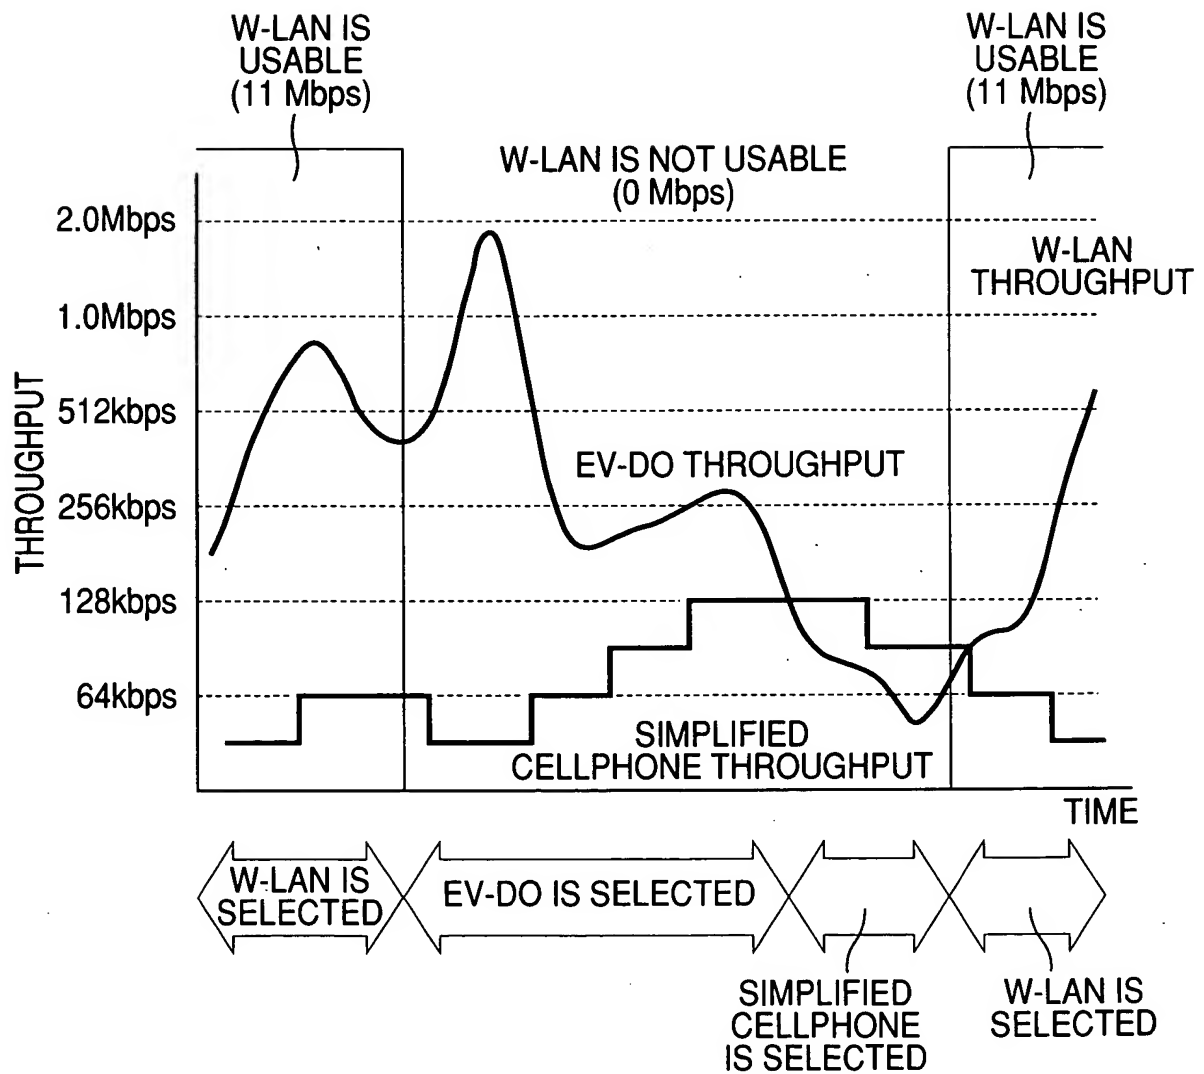
FIG. 11

FIG. 12

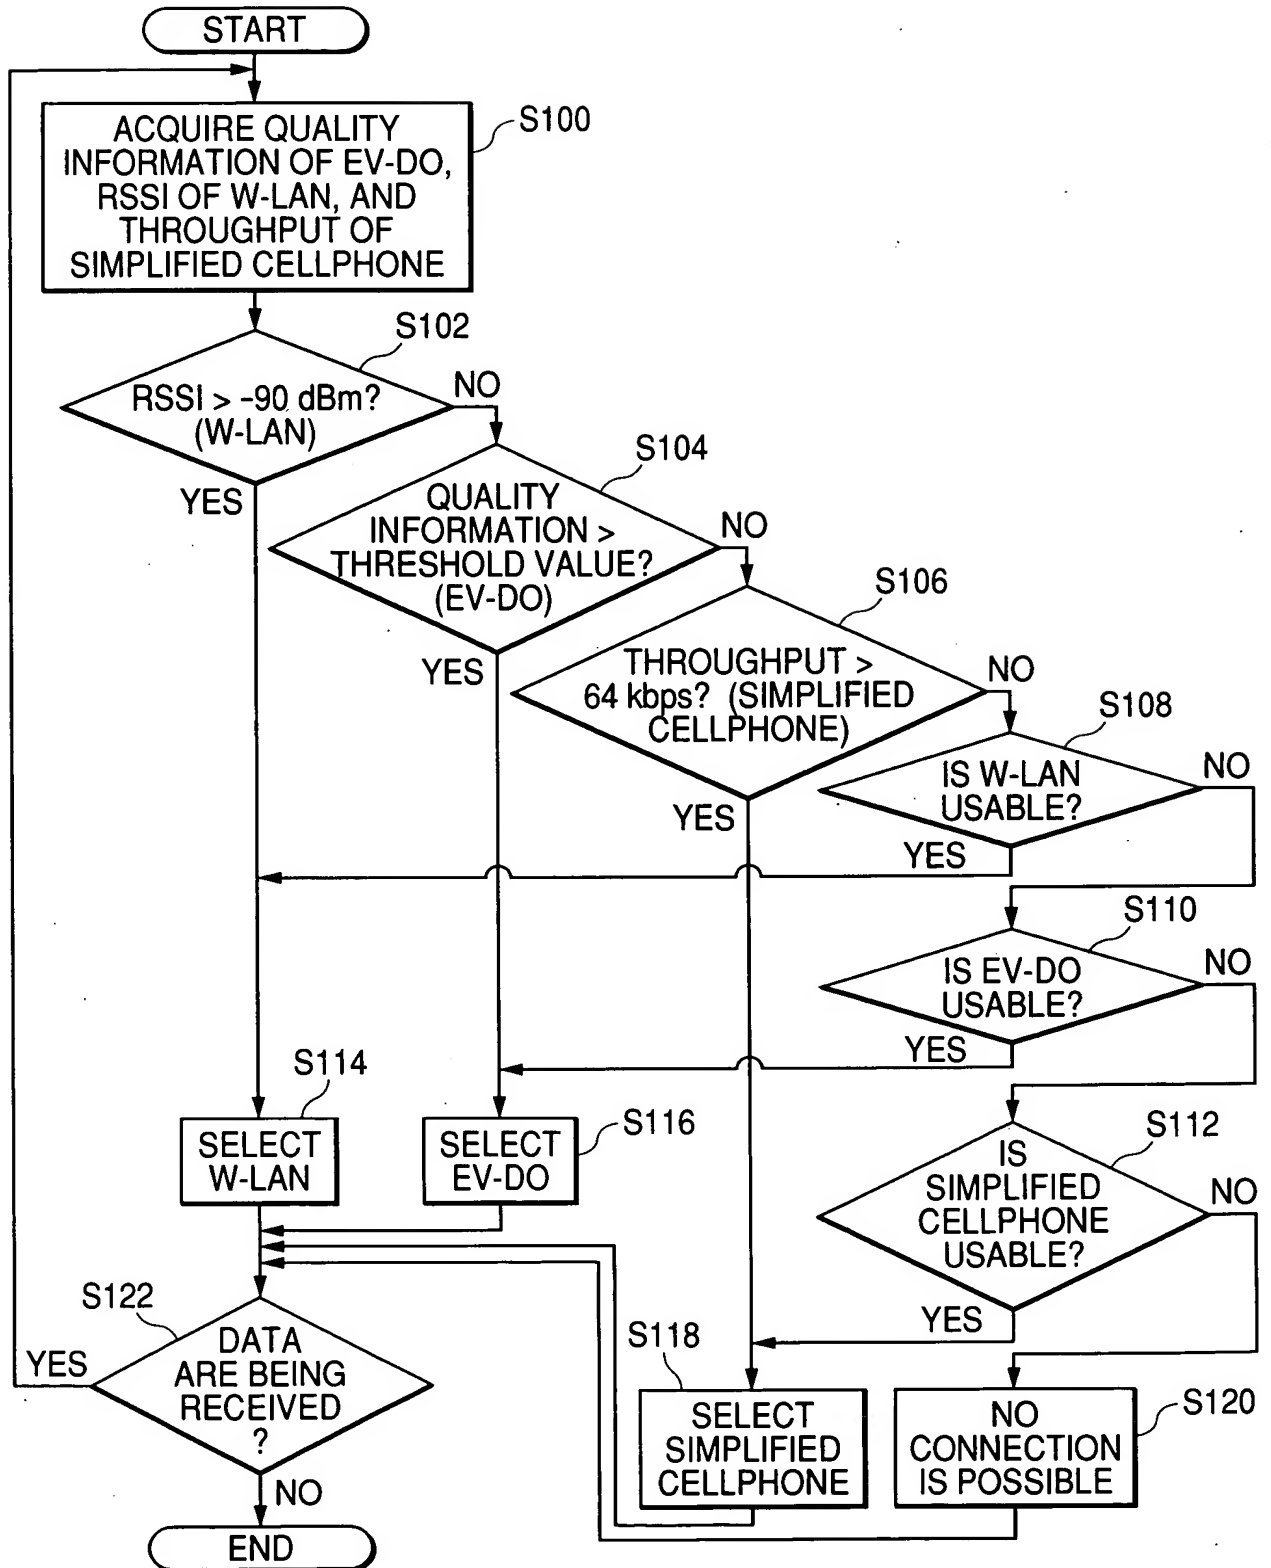


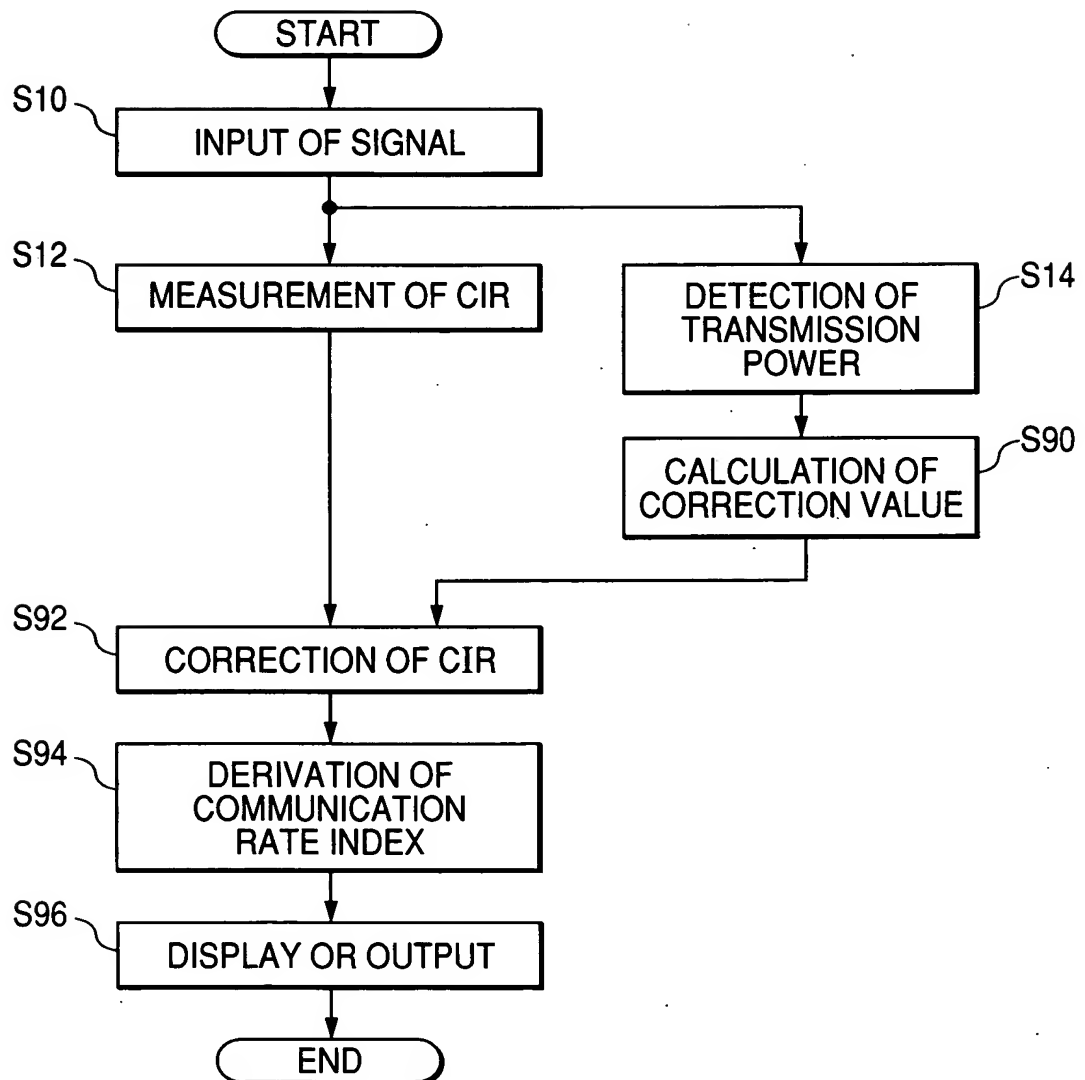
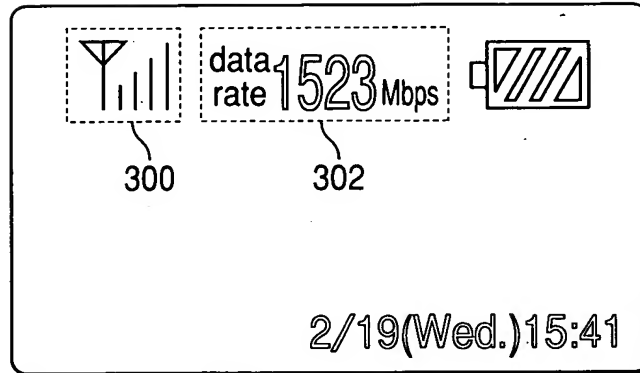
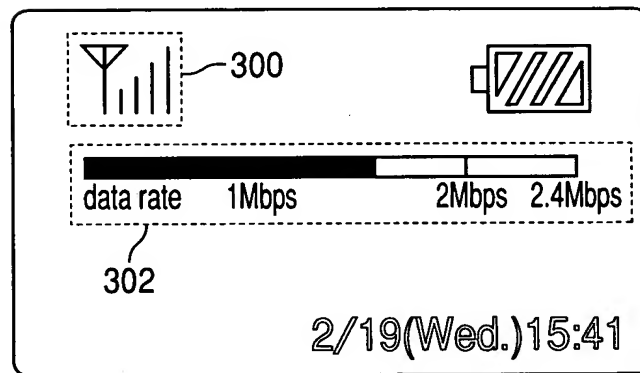
FIG. 13

FIG. 14

TRANSMISSION POWER VALUE (dBm)	[TRANSMISSION POWER VALUE] - [MAXIMUM TRANSMISSIBLE POWER VALUE] (dB)	CORRECTION VALUE (dB)
+22.5—	—0.5	-20
+22.0—+22.5	0.5—1.0	-19
+21.5—+22.0	1.0—1.5	-18
+13.0—+13.5	9.5—10.0	-1
—+13.0	10—	0

FIG. 15A**FIG. 15B****FIG. 16**

LED INDICATION	OFF	FLASHING (1)	FLASHING (2)	ON
COMMUNICATION RATE INDEX	OUT OF RANGE	SLOW (LOWER THAN 500 kbps)	MEDIUM (500 kbps TO 1 Mbps)	FAST (HIGHER THAN 1 Mbps)

FIG. 17

RECEPTION POWER VALUE (dBm)	[RECEPTION POWER VALUE] - [MINIMUM RECEIVABLE POWER VALUE] (dB)	CORRECTION VALUE (dB)
—103.0	—1.0	-10
-103.0—-102.0	1.0—2.0	-9
-102.0—-101.0	2.0—3.0	-8
-95.0—-94.0	9.0—10.0	-1
-94.0—	10—	0

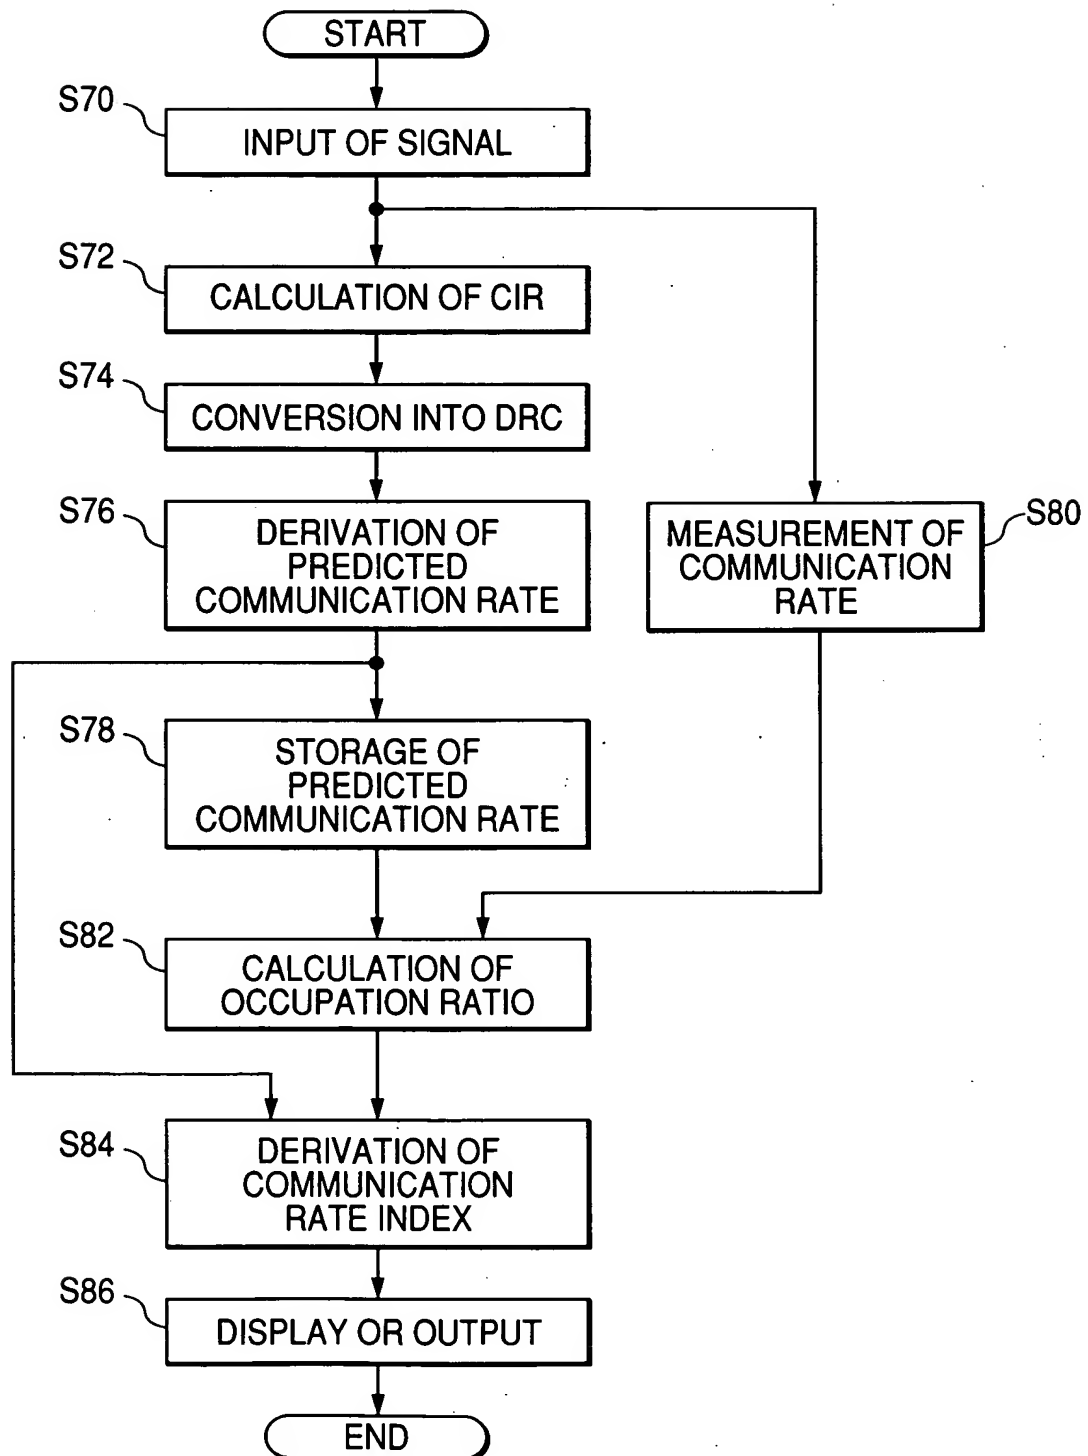
FIG. 18

FIG. 19

DRC VALUE	COMMUNICATION RATE (kbps)	PACKET LENGTH (Slots)
0x0	NULL RATE	N/A
0x1	38.4	16
0x2	76.8	8
0x3	153.6	4
0x4	307.2	2
0x5	307.2	4
0x6	614.4	1
0x7	614.4	2
0x8	921.6	2
0x9	1228.8	1
0xa	1228.8	2
0xb	1843.2	1
0xc	2457.6	1
0xd	INVALID	N/A
0xe	INVALID	N/A
0xf	INVALID	N/A